


MT14 B760

Client & Workstation



- ✓ Ideal in all home & office contexts
- ✓ 13th generation Intel® Core™ processor
- ✓ Up to 128GB DDR4-3200 U-DIMM
- ✓ Intel® HD graphics with up to 4 simultaneous displays
- ✓ Support for dedicated PCI Express 4.0 x16 video cards
- ✓ Ultra-Fast M.2 with PCIe 4.0 x4
- ✓ Built-in High-Definition Audio 2/4/5.1/7.1-channel
- ✓ RAID

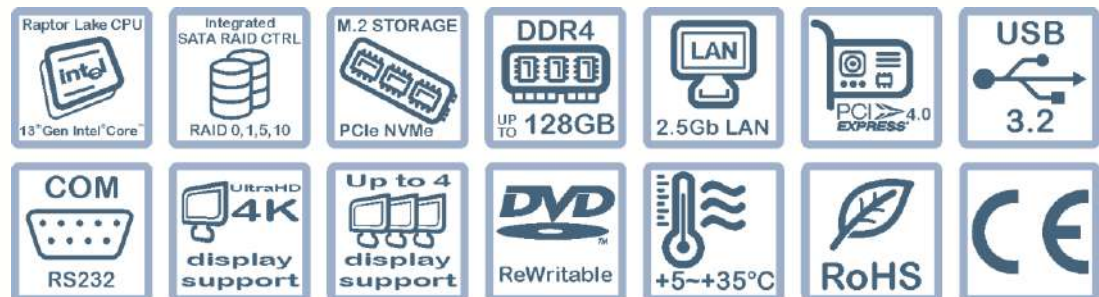

MT14 B760

Client & Workstation



System	Processor	Socket LGA 1700 Intel® Core™ 13 th & 12 th gen. Intel® Core™ i9 / i7 / i5 / i3 / Pentium	
	Chipset	Intel® B760 Express Chipset	
	BIOS	1 x 128 Mb AMI UEFI BIOS PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0	
	Expansion slots	1 x PCI Express 4.0 x16 2 x PCI Express 3.0 x1	
	Memory	Max expansion	128GB
	Type	DDR4 3200/2933/2666/2400/2133 UDIMM 288pin 4GB, 8GB, 16GB, 32GB	
	Slots	4	
Front I/O Interfaces	Audio	1 x Jack 3.5mm headphone 1 x Jack 3.5mm microphone	
	USB	2 x USB 3.0 Gen.1 Type A	
	POWER SWITCH	1 x Power Switch	
	STATUS LED	1 x Power Led 1 x Hdd Led	
	Back I/O interfaces	Serial	1 x RS232 (optional)
	LPT	1 x LPT (optional)	
	USB	3 x USB 3.2 Gen.1 Type A 1 x USB 3.2 Gen.2 Type-C® 2 x USB 2.0 Type A 1 x USB 2.0 Type A (*optional)	
	Keyboard/Mouse	1 x PS/2 (keyboard/mouse port)	
	Audio	3 x Jack 3.5mm (Line In, Line Out, Mic In)	
	LAN	1 x RJ45	
	Video	1 x VGA 1 x HDMI 2 x DisplayPort	
Storage	Integrated SATA ctrl	4 x SATA 3 6Gb/s 1 x M.2 (Socket 3, M key, 2280 PCIe 4.0 x4x2, M2A_CPU) 1 x M.2 (Socket 3, M key, 2280 PCIe 4.0 x4x2, M2P_SB) Support for RAID 0, 1, 5, 10	
	Card Reader	*Optional	
	Internal bay	1 x *HDD/SSD SATA 2.5" or 3.5" unit	
	External bay	1 x *ODD 5.25" unit	
	Note	* Check the installed basic model and the available options on the web configurator	
	Audio subsystem	Integrated audio	Intel® HD Audio (codec Realtek®)
		Channel	2 / 4 / 5.1 / 7.1 The HDMI & DisplayPort port carries the audio signal

Graphics subsystem	Integrated graphics video interfaces	Intel® HD Graphics (depends on the CPU model)
	Max resolution	VGA : 1920x1200@60Hz HDMI 2.0: 4096x2160@30Hz (HDCP 2.3 support) 1 x DP 1.2: 4096x2304@60Hz (HDCP 2.3 support) 1 x DP 1.2: 4096x2304@60Hz
	Contemporary active displays	Max 4 contemporary active displays (the operating system used must support this function)
Network subsystem	Integrated network controller	1 x 2.5 Intel® GbE LAN (2.5Gbit/1Gbit/100Mbit)
Security	Trusted Platform Module	Optional TPM2.0 module
Power	Standard PSU	500W TX ACTIVE PFC, 80Plus Bronze AC INPUT:180-265V, 3A ,50-60Hz
Mechanical features	W x H x D	170mm x 365mm x 405mm
	Weight	7 Kg for medium configuration
	Internal bay	1 x 3.5" unit
	External bay	1 x 5.25" unit 1 x 3.5" unit
	Color	Black
Software	Supported operating system	Microsoft Windows 10 / 11 64bit
Environment	Operating temp.	From +5°C to + 35°C
	Non op. temp.	From -20°C to +70°C
	RH	95% @ 30°C non cond.
	Suitable for	Indoor use only
Product certifications	Cooling System	Forced mechanical ventilation
	Reference marks	CE, RoHS
	Directives, rules & regulations	Built according to European Directive 2014/30/EU (EMCD), 2014/35/EU (LVD) & 2011/65/EU 2015/863/EU (RoHS III)
Company Certifications	Reference standard	UNI EN ISO 9001
Ordering code	CNMGAFTNINO	MT14 Intel B760, 2.5 Gbe Lan+SATA3, RAID, USB 2.0/3.0

Doc ref. ZST-4292-00000197-00



Scan me



Intercomp S.p.A.

Via della Scienza 27, 37139, Verona, Italia
Tel +39 045-8378411 Fax +39 045-8510539
www.intercomp.it intercomp@intercomp.it

The product may differ from the images shown. All registered names and trademarks are legitimate owners. All features and specifications can be changed without prior notice.
Last update 12/01/2023